

2 POST LIFT



HDM4200/230V

ELECTRO-HYDRAULIC

HDM4200/400V

ELECTRO-HYDRAULIC



4200 kg





400V/3ph/50Hz
230V/1ph/50Hz



2.2 KW



600 kg

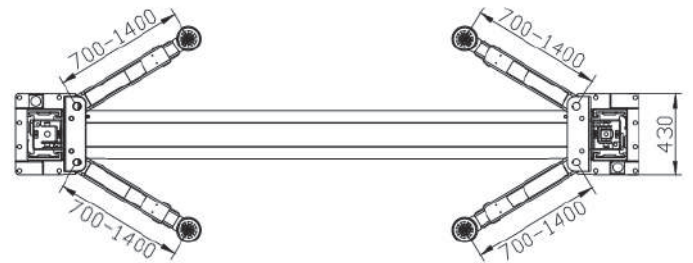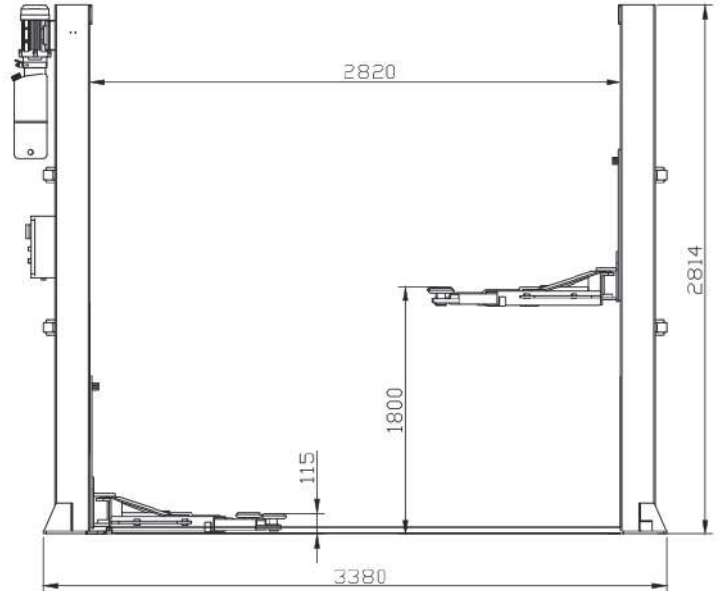

Description:

- Floor installation
- 2 hydraulic cylinders and driven chain
- Steel rope synchronization
- Solenoid lowering valve
- Electromagnet locking system
- Top limit switch
- 3 stage symmetric arms

Technical Data:

Capacity:	4200 kg
Lifting time:	45 s
Lowering time:	65 s
Power supply:	400V/3ph/50Hz/2.2KW 230V/1ph/50Hz/2.2KW
Weight:	600 kg

3 Stage Arms

Accessories Included:

- 4 x support pads
- 4 x 65 mm extensions

